


EMN 200 .. 2000-D3 (3 phase Delta)

The EMN (Energy Meter Node) series is an AC energy submeter with a wireless mesh network communications output. The D3 is designed for three phase networks without the neutral and with an inter-phase voltage up to 300V rms. This module is compatible with the Mesh Gate L or XL.



Electrical data

Symbol	Description	Types	Units
I_{PN}	Primary nominal current rms (A)	EMN 200 D3	
		EMN 500 D3	
		EMN 1000 D3	
		EMN 2000 D3	
I_{PM}	Primary current, measuring range (of I_{PN})	120	%
V_{PM}	Primary voltage, measuring range (neutral/phase) ¹⁾	90 .. 300 ²⁾	V_{rms}
	Permanent overload voltage (neutral/phase)	300	V_{rms}
f	Frequency	50/60	Hz
S	Output signal: radio frequency communication ³⁾ see Mesh Gate datasheet		
	Power supply	Line powered between N-L1 inputs ⁴⁾	
V_{PN}	Primary nominal, voltage (neutral/phase)	100 .. 272 ²⁾	V_{rms}
P_C	Maximum power consumption	2	W

Measurement values

	Configurable reading interval: 5 .. 30 min						Counter values		
	Interval base values								
	L1			L3			SUM		
	Av	Min	Max	Av	Min	Max			
Current (A)									
Voltage (V)									
Active Energy (KWh)									
Reactive Energy (kVarh)									
Apparent Energy (kVA)									

f Frequency measured from phase 1 (L1)

Accuracy

Symbol	Description	Max	Units
X	Accuracy @ $T_A = 25^\circ C$		
	Rms current @ I_{PN}	1.5	%
	Rms voltage @ V_P	1.5	%
	Active Energy (refer to IEC 62053-21 class 2)	± 1	%
	Reactive energy (refer to IEC 62053-23 class 3)	± 3	%

General data

T_A	Ambient operating temperature	- 10 .. + 55	$^\circ C$
T_S	Ambient storage temperature	- 25 .. + 70	$^\circ C$
m	Mass	400	g
IP_{xx}	Protection index	IP 2X	
	Standards	EN 50178: 1997	
		IEC 61010-1: 2001	
	Range to Mesh Gate or Mesh Node (indoor, line of sight)	20	m

Notes: ¹⁾ See connection diagram (Neutral connected to L2)

²⁾ Series available Q2 2009

³⁾ RF Certification: CE, FCC, IC, Japan (pending)

⁴⁾ Not designed for 230/400 nor 277/480 V_{rms} network
For these networks, use EMN 200.. 2000 D3/SP2.

Features

- Wide range of electrical parameters measurement
- Wireless communication on license free 2.4 GHz-transmit RF power maximum
EIRP: 10 dBm(10mW)
- Class 1 accuracy active energy.

Advantages

- Fast & easy mounting:
 - Wireless communication
 - Split core Rogowski coil
 - Self powered from voltage line
- Compact
- Gateway interface: RS 232/485 Modbus RTU
- Ideal for retrofit applications.

Applications

- Energy sub-metering
- Network condition monitoring
- Energy audit & diagnostic
- Building energy management.

Application Domain

- Energy and Automation.

EMN 200 .. 2000-D3 (3 phase Delta)

Isolation characteristics



Isolation class II
IEC 61010-1 cat III 300 Vrms
Pollution degree: PD2

Safety

CB test Certificate N° FR 583050 IEC System for mutual recognition of test certificates for electrical equipment (IECEE) CB Scheme



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.




Caution, risk of electrical shock: Do not remove any parts of the EMN - D3



For current sensor (Rogowski coil) mounting:
make sure that the power cable on which the Rogowski coil will be attached is powered off.

EMN 200 .. 2000-D3 (3 phase Delta) (in mm. 1mm = 0.0394 inch)

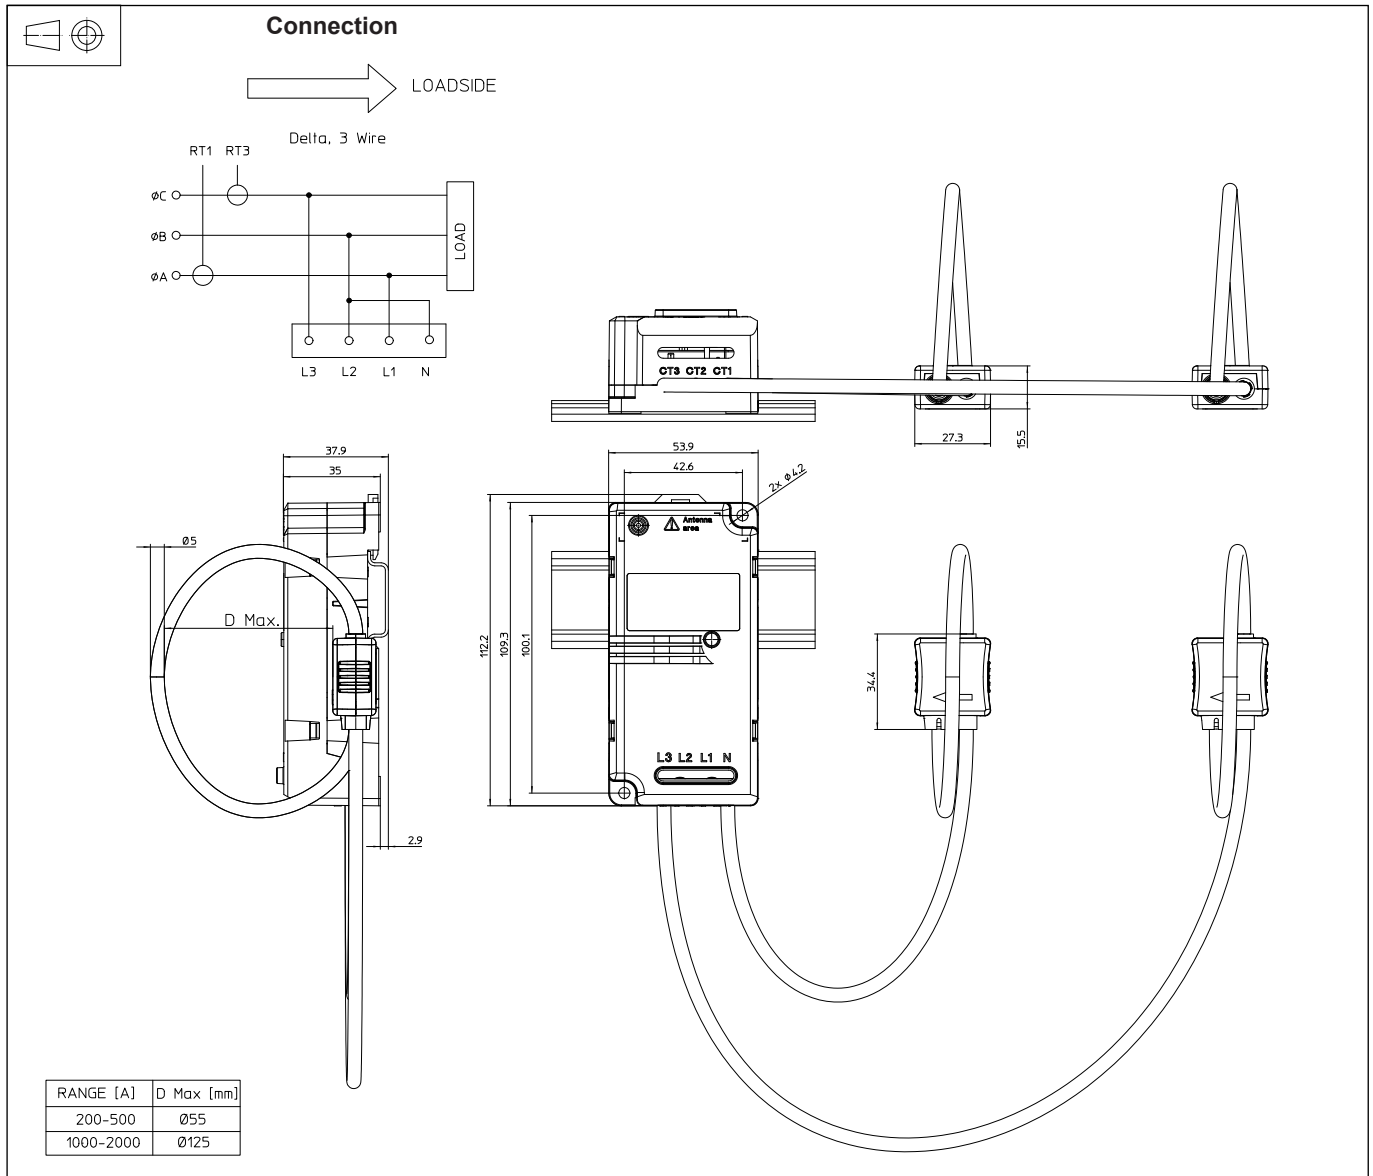

Mechanical characteristics

- General tolerance ± 1 mm
- Primary through-hole of Rogowski coil. see drawing above
- Rogowski coil output cable length: 1.5 m
- Module fixing DIN rail rear box or
- Module fastening 2 notches $\text{Ø } 4.2$ mm
2 M4 steel nuts
Recommended fastening torque 2.8 Nm or 2.07 Lb.-Ft.
- Voltage connections 4 M3
Recommended fastening torque 0.5 Nm or 0.37 Lb.-Ft.
- Input voltage terminal use cable max cross section 2.5 mm^2

Remarks

- Temperature of the primary conductor should not exceed 65°C .
- EMN module must be installed vertically as shown on the diagram above.